


Technical Data			
Model Type	CP60 250	CP60 260	CP60 270
Peak Power (Pmax) Watts	250	260	270
Voltage at Maximum Power (Vmp)	30.34	30.93	31.04
Current at Maximum Power (Imp)	8.24	8.43	8.73
Open Circuit Voltage (Voc)	37.33	37.67	38.39
Short Circuit Current (Isc)	8.69	8.83	9.15
Frame / Backsheet Color*	BB (Black Frame, Black Backsheet) / BW (Black Frame, White Backsheet) / SW (Silver Frame, White Backsheet)		
Series Fuse	15 Amps		
Maximum System Voltage	1000V		
Temperature Coefficient (Pmax)	-0.420 % / °C		
Temperature Coefficient (Voc)	-0.313 % / °C		
Temperature Coefficient (Isc)	0.046 % / °C		
Output Cable	#12AWG (4 mm) x 39.4" (1000 mm)		
Connector Plug	MC4		
Load Rating** lb/ft ² (Pa)	112 (5400)		
Weight lbs (kg)	40.8 (18.5)		
Cell in series size (mm)	60 cells 6.1" X 6.1" (156mm X 156mm)		
Nominal Operating Cell Temp. (NOCT)	44 °C ± 2 °C		


* Check for availability of frame / backsheet color

** Must be installed according to installation manual


Dependence on Temperature

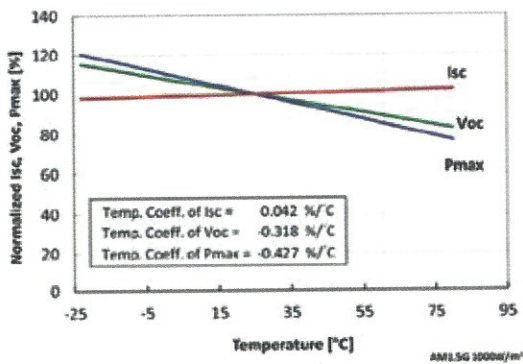

Physical Specifications

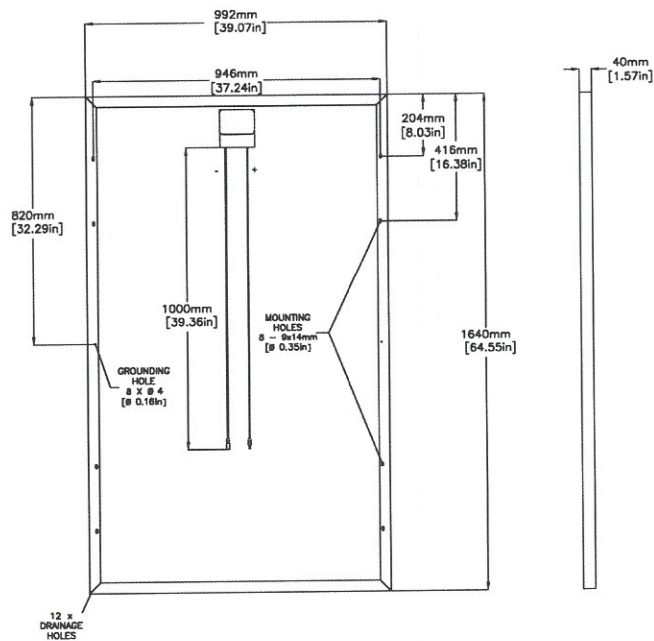

Dependence on Irradiance

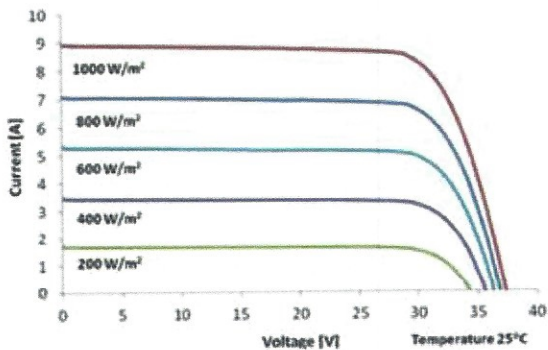

Copyright 2015, Rev (01) 02/09/2015. Specifications are subject to change without notice. All trademarks are the property of their respective owners.

